

## ***Sport Sway Bar Kit 22435, 22437 Mazda MX-5, RX-8***

*Thank you for your purchase from our new line of Mazda parts.  
Please call us at 877 - 4NO - ROLL if you have any questions  
regarding the service or installation of your Hotchkis Performance products.*

### ***Installation of Hotchkis Front Sway Bar***

#### **1F *Raising Vehicle***

Removal of the front sway bar should be done at ride height, so it is recommended that the vehicle be raised by a flat alignment style rack, or place the front of the vehicle on ramps and securely block the rear wheels.



#### **2F *Remove front Splash Guard***

To access the front sway bar you will need to remove the front splashguard. There are a series of screws and snap clips that hold it in place. Once all the clips and screws are removed you can set the splashguard aside.




3F ***Detach End Links***

Loosen and remove the lower end link nuts from both sides, and push links aside.



4F ***Disconnect Lower Radiator Supports***

There are 2 mounting supports that position the radiator. Loosen and remove the 2 bolts per mount. The radiator is still supported by the upper mounts, so you need not worry about the radiator falling down.

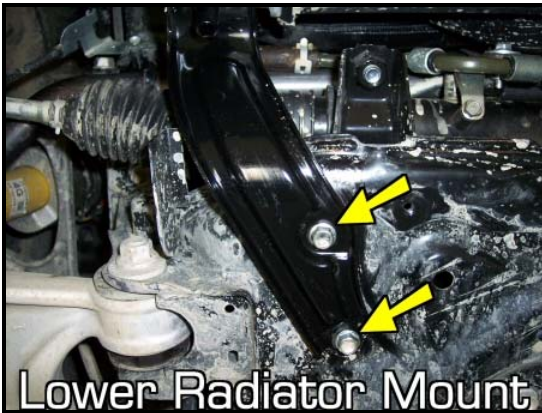


5F ***Undo the Sway Bar Bushing Bracket Bolts***

Loosen and remove the sway bar bushing bracket bolts. There are 2 per bracket. Once the bolts are removed, the bar should be loose from the vehicle.



6F ***Remove the Front Sway Bar***


It's a tight fit where the front bar is, so it will take some patience removing the sway bar. To ease removal, take off the bushings from the bar. It also helps raising the front of the vehicle slightly allowing the suspension to droop to gain more clearance. It's sort of a puzzle the way the bar comes out, but rest assured, it does come out fairly easily. One of your goals when tryin to get this darn thing out is to get the sway bar ends over the steering tie rods. Normally the bar is behind the tie rods, but to get them out you need to flip the bar ends over to the front. From that point you should be able to fish it out. Try to remember how the bar comes out, for this will be the same procedure getting the new Hotchkis bar in. Note: Some of the pictures below are of the Hotchkis bar. Pretend it's the stock bar.

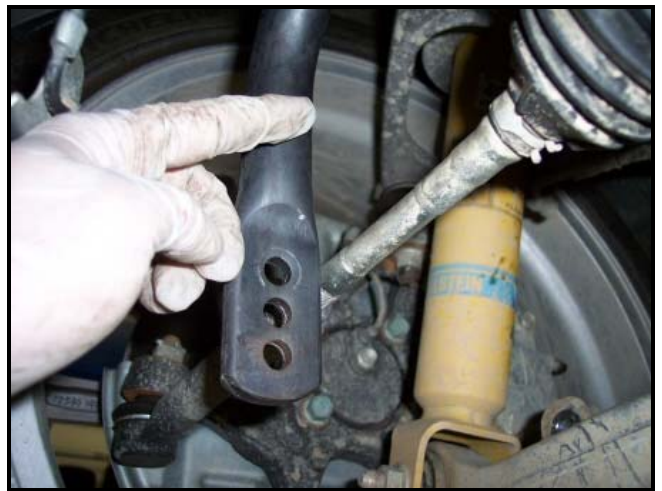

7F **Reinstall New Hotchkis Bar**

Repeat steps 1F through 6F in reverse order. Your new Hotchkis bar uses new bushings and brackets. Use the supplied silicon grease to lube the inside surface of the bushings. Make sure to use thread lock compound on the subframe bushing bracket bolts and the end link nuts. Special Note: Due to the shape our bushing brackets, the ABS line bracket will need to be ground down to allow the Hotchkis bracket to sit flat. This is quite easy to do. You can use a file to grind down section in question. This will be necessary for both sides. Reuse the oem nuts for the Hotchkis installation. This sway bar is adjustable, so please refer to the following pictures to help you figure out the setup you desire.



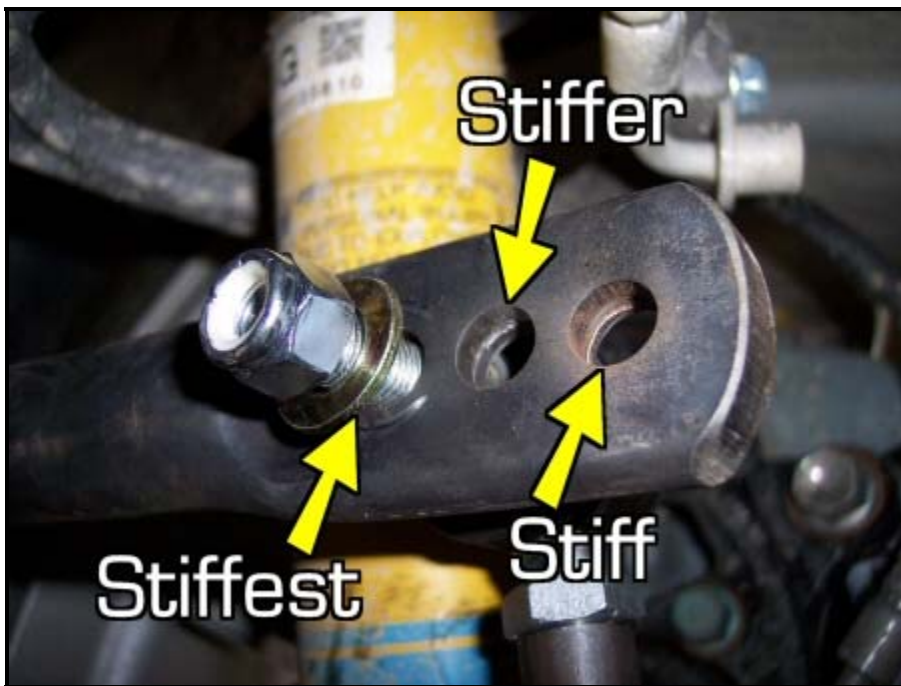

*(Please ignore the hardware shown in the above picture)*

8F ***Double Check Hardware***

Make sure all hardware is fully tightened before driving the vehicle. Let's move to the rear sway bar.

## *Installation of Hotchkis Rear Sway Bar*

### 1R ***Raising Car***

Removal of the rear sway bar should be done at ride height, so it is recommended that the vehicle be raised by a flat alignment style rack, or place the rear of the vehicle on ramps and securely block the front wheels.



### 2R ***Detach End Links***

Loosen and remove the lower end link nuts from both sides, and push links aside.




3R ***Undo the Sway Bar Bushing Bracket Bolts***

Loosen and remove the sway bar bushing bracket bolts. There are 2 per bracket. Once the bolts are removed, the bar should be loose from the vehicle.



4R ***Reinstall New Hotchkis Bar***

Repeat steps 1R through 3R in reverse order. Your new Hotchkis bar uses new bushings and brackets. Your kit comes with flat cut washers for the bushing bracket nuts. Install these washers before you install the OEM nuts. Use the supplied silicon grease to lube the inside surface of the bushings. Make sure to use thread lock compound on the subframe bushing bracket bolts and the end link nuts. You can adjust the stiffness of the rear sway bar based on which end link hole you use. The hole closest to the end of the bar is the softer setting and the hole furthest from the end is the stiffest setting.

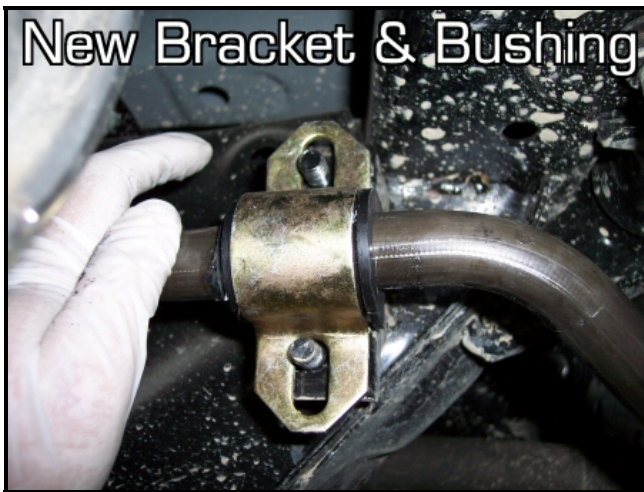



Reinstall End Links

5R ***Double Check Hardware***

Make sure all hardware is fully tightened before driving the vehicle. You are done with the installation. The vehicle does not require an alignment after this installation.



## **Hotchkis Performance LLC Return Policy & Limited Warranty**

**Effective September 1, 2007. This return policy and limited warranty supersedes all previous policy and warranty statements. Policies and warranties are subject to change without notice. Hotchkis Performance is not responsible for printing errors.**

### **Return Policy**

We want you to be completely satisfied with your Hotchkis Performance product. In case you're not, you can exchange or return it within 30 days of the purchase date. To obtain a full refund on unused products, excluding freight, please contact our Customer Service Department at (562) 907-7757. You will be assigned a Returned Goods Authorization Number (RGA). The package you return must show the RGA on the outside of the package, include the original invoice and be shipped prepaid to our facility. The product has to be unused and in its original packaging materials and be in sellable condition. For products presenting signs of use or damage, only warranty claims will be accepted. Exchanges or refunds made after 30 days will be subject to a 20% restocking charge. If you purchased your Hotchkis Performance product from an authorized dealer, you are still covered by this return policy. All returns however, should be made to your dealer, not to Hotchkis Performance directly.

### **Limited Warranty**

Hotchkis Performance warrants its products against defects in materials and workmanship for the term of 36 months (3 years) from the date of purchase. This Warranty only applies to the original retail purchaser who retains ownership of the vehicle on which the product was originally installed. If the product is determined to be defective, Hotchkis Performance will repair, replace or refund the purchase price of the defective product at Hotchkis Performance's sole discretion, which shall fully satisfy and discharge any and all warranty claims. Any repaired or replaced product will be returned to the sender freight prepaid.

### **Exclusions from Warranty**

Items offered but not manufactured by Hotchkis Performance are warranted according to the manufacturer's terms and are not covered by this limited warranty. Hotchkis Performance shall not be responsible for any labor, removal, installation, re-installation or maintenance costs. This warranty does not cover the cosmetic finish or plating of any product or any normal wear and tear to any product. In addition, this warranty does not apply to any products that have been:

- Improperly installed or installed by someone other than a qualified, licensed auto mechanic experienced in the installation and removal of suspension products;
- Improperly serviced, misused, or modified, altered or subjected to abuse, negligence, accident or collision;
- Installed in any vehicle that has been modified;
- Installed on any vehicle that has carried loads in excess of automobile manufacturer suggested weight limits; or
- Installed on any vehicle that has been subject to abnormal or excessive use, including rallying, racing or racing-type activities or off-road use.

### **Limitation of Warranty**

This limited warranty is the entire and only warranty for the products and may not be modified or supplemented by any other person or company in any form. Any description of the products, by anyone, is for the sole purpose of identifying them and is not part of the basis of the bargain, and does not constitute a warranty that the products will conform to that description. The statements of any salesperson do not constitute part of this limited warranty and cannot be relied upon as a warranty.

**THERE ARE NO WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, WHICH EXTEND BEYOND THE DESCRIPTION ON THE FACE HEREOF. ANY IMPLIED WARRANTIES ARE DISCLAIMED TO THE FULLEST EXTENT PERMITTED BY LAW. THIS WARRANTY DOES NOT COVER CONSEQUENTIAL DAMAGES, LOSS OF TIME OR REVENUES, INCONVENIENCE, LOSS OF USE OF THE VEHICLE, DAMAGE TO THE VEHICLE OR COMPONENTS OF THE VEHICLE, ANY OTHER TYPE OF CONSEQUENTIAL DAMAGES, OR OTHER INCIDENTAL OR INDIRECT DAMAGES. HOTCHKIS' MAXIMUM LIABILITY UNDER THIS WARRANTY SHALL IN NO EVENT EXCEED THE PURCHASE PRICE OF THE PRODUCT.** Some states do not allow limitations on how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damages and in such states the above limitations or exclusions may not apply. This limited warranty gives the purchaser specific legal rights and the purchaser may have other rights that may vary from state to state.

### **Technical Information**

Hotchkis Performance makes every effort to ensure that you are provided with the most accurate and up-to-date technical information. However, all technical information is approximate and may vary upon application. Additional suspension components may be needed in some applications, depending upon the make, model, engine and chassis of the vehicle. Hotchkis Performance is not responsible for any consequences resulting from manufacturer's technical mid-year changes. Hotchkis Performance products should only be installed by a qualified, licensed auto mechanic experienced in the installation of such products.

### **Warranty Claim Procedure:**

The answer to ALL the following questions should be YES before making a warranty claim:

- Is the product appropriate to your application?
- Did you carefully and thoroughly read the instructions provided along with the product?
- Do you have the original invoice or sales receipt?
- Is the return date within 36 months from the purchase date?
- Are you the original purchaser?
- Was the product properly installed by a qualified, licensed auto mechanic?
- Has the product been installed on the original vehicle on which it was installed at all times?
- Is the product unmodified and clean?
- Is the reason for return a legitimate product defect?

If the answer to all these questions is YES, please contact our Customer Service Department at (562) 907-7757. You will be given a Returned Goods Authorization Number (RGA) valid for 60 days. You will also be asked to ship the product prepaid to our facility. All shipments MUST be (i) prepaid, (ii) include the original invoice or sales receipt, (iii) show the RGA on the outside of the package and (iv) include your name, address, make and model of the vehicle, and a brief description of the claimed defect, including the circumstances under which the defect occurred. Warranty related inquiries should be sent to the following address:

**HOTCHKIS PERFORMANCE, LLC  
C/O CUSTOMER SERVICE  
12035 BURKE ST. SUITE 13  
SANTA FE SPRINGS, CA 90670**

Hotchkis Performance will not accept product returns without the RGA number, receipt and the information described above. C.O.D. or collect shipments will be refused. Once the returns are received at Hotchkis Performance, we will evaluate the products, verify the sales receipt, and investigate the warranty claim.